



The World Best

YJ LINK

Setting the Standard

Board Handling & Automation System Equipment

SMT IN LINE SYSTEM LAY-OUT

SMT IN LINE-1



- | | |
|-----------------------------|-------------------------------|
| ① MAGAZINE LOADER (ALD-12S) | ⑥ MOUNTER |
| ② SCREEN PRINTER | ⑦ WORK TABLE (AWT-80S) |
| ③ LINK CONVEYOR (ACC-60S) | ⑧ REFLOW OVEN |
| ④ MOUNTER | ⑨ MAGAZINE UNLOADER (AUD-12S) |
| ⑤ LINK CONVEYOR (ACC-60S) | |

SMT IN LINE-2



- | | | |
|-----------------------------|------------------------------|-------------------------------|
| ① MAGAZINE LOADER (ALD-12S) | ⑥ MOUNTER | ⑪ AOI |
| ② VACUUM LOADER (AVL-60S) | ⑦ MOUNTER | ⑫ NG BUFFER (ANB-15S) |
| ③ 180° TURN (AVT-50S) | ⑧ GATEWAY CONVEYOR (AG1-80S) | ⑬ MAGAZINE UNLOADER (AUD-12S) |
| ④ SCREEN PRINTER | ⑨ WORK TABLE (AWT-80S) | |
| ⑤ LINK CONVEYOR (ACC-60S) | ⑩ REFLOW OVEN | |

SMT IN LINE-3




- | | | |
|-----------------------------|------------------------------|-------------------------------|
| ① MAGAZINE LOADER (ALD-12S) | ⑥ GATEWAY CONVEYOR (AG1-80S) | ⑪ AOI |
| ② SCREEN PRINTER | ⑦ MOUNTER | ⑫ NG BUFFER (ANB-15S) |
| ③ SPI | ⑧ WORK TABLE (AWT-80S) | ⑬ MAGAZINE UNLOADER (AUD-12S) |
| ④ NG BUFFER (AMR-35S) | ⑨ REFLOW OVEN | |
| ⑤ MOUNTER | ⑩ RACK BUFFER (ARB-25S) | |

Magazine & PCB Specifications

MAGAZINE TYPE							
	L	W	H	L	W	L	W
S (097)	355	320	570	330	250	50	50
Y (096)	460	400	575	440	330	50	65
L (093)	535	460	570	530	375	50	60
XL(100)	535	530	575	530	460	50	100
2XL(101)	620	530	575	610	460	50	100
SW(099)	620	320	575	600	236	50	60

※Customer magazine available

Product Contents

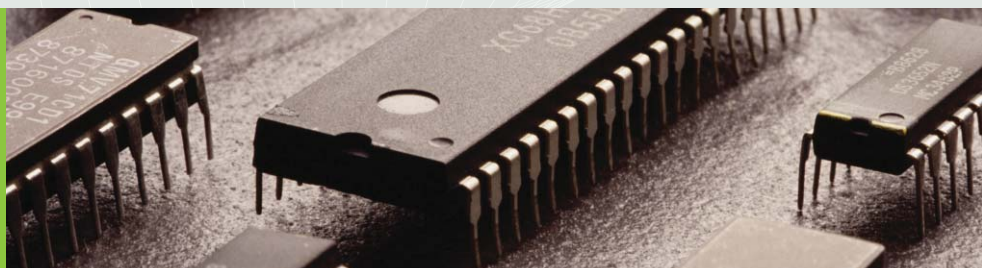

MARKING / SCREEN PRINTER

SCREEN PRINTER	AXP-70SE, AXP-88RE	4~5P
LASER MARKING MACHINE	ALMC-33YL, ALMC-46X	6~7P
LABEL PRINT MACHINE	ALBL-40YU	8~9P
INKJET MARKING MACHINE	AIMC-40YU	10~11P

LOADING / UNLOADING

MAGAZINE LOADER CE TYPE	ALD-12CE	12P
MAGAZINE UNLOADER CE TYPE	AUD-12CE	13P
MAGAZINE LOADER STANDARD TYPE	ALD-12S	14P
MAGAZINE UNLOADER STANDARD TYPE	AUD-12S	15P
MAGAZINE LOADER HUMAN TECHNOLOGY TYPE	ALD-22SH	16P
MAGAZINE UNLOADER HUMAN TECHNOLOGY TYPE	AUD-22SH	17P
VACUUM LOADER	AVL-60S	18P
BOAT LOADER / UNLOADER	ABL-B20, ABU-B20	19P

CONVEYOR

LINK CONVEYOR	ACC-60S	20P
WORK TABLE	AWT-80S	21P
REJECT CONVEYOR - ANRC SERIES	ANRC-100CE	22P
AOI & AXI REWORK CONVEYOR - ADNC SERIES	ADNC-1200CE	23P
GATE CONVEYOR	AG1-80S	24P
WAVE SOLDERING IN FEED / OUT FEED	AIC150S, AOC-300S	25P
MANUAL INSERTION CONVEYOR		26P

SLIDING / TURNING

SHUTTLE CONVEYOR - TRAVERSER	ASHC-50S	27P
SLIDING CONVEYOR - FIXED RAIL CHANGER	ASC-50S	28P
INVERTER - VERTICAL TURN CONVEYOR	AVT-50S	29P
TURNING CONVEYOR - HORIZONTAL	AHT-50S	30P
MULTI FUNCTION TURNING CONVEYOR	AHVT-50S	31P
HORIZONTAL MULTI ANGLE TURNING CONVEYOR	AHT-50SM	32P

BUFFER

BUFFER STACKER - RACK TYPE	ARB-25S	33P
BUFFER STACKER - MAGAZINE TYPE	AMB-12S	34P
AOI NG BUFFER - INDIVIDUAL CONVEYOR TYPE	ANB-15S	35P
AOI NG BUFFER - RACK TYPE	ARB-25S	36P
AOI NG BUFFER - MAGAZINE TYPE	ARB-25S	37P
SPI NG / GOOD BUFFER	AMR-35S	38P
SPI NG / GOOD BUFFER EXPLANATION	AMR-35S	39P

CUSTOMIZED EQUIPMENT

PCB CLEANER	ADRC-50S	40P
LINE UP CONVEYOR	ALC-50S	41P
SOLDERING ROBOT MACHINE		42P

COMPANY HISTORY

.....	43P
-------	-----

OTHER MACHINES

.....	44~45P
-------	--------

Setting the Standard SCREEN PRINTER

The World First Ethernet Motion Control in Screen Printer



Features

- High Accuracy and High Speed Printing by Servo Motor Mechanism
- High Accuracy θ Axis Alignment by Harmonic Drive System
- Simple & Easy LAN Interface with Embedded Motion Board and Camera
- Built-in 2D Inspection System
- Easy Model Changeover by Full Automatic Motorized Width Control Conveyors (Loader, Unloader and Stage Conveyors)
- Fail-safe Operation by All Door Inter Lock System
- Pre-Align Mechanism for High Throughput
- Simple & Easy User Interface by separated Windows for Setup and Run Operation
- XML based Data Storage for Machine, Model and Log Data
- Easy to Edit Model Recipe by built-in Copying Function from Previous Model Recipe
- Remote Diagnosis by Machine State Log and built-in Screen Capture Function

MODEL	MACHINE DEMENSION (L×W ×H)	Max. PCB (L×W)	Min. PCB (L×W)	Weight (kg)
AXP-33XE	1120 X 1400 X 1435	330×250	50×50	700
AXP-46LE	1636 X 1380 X 1435	460×360	50×50	880
AXP-70SE	1876 X 1480 X 1435	700×460	50×70	1020
AXP-88RE	1936 X 1680 X 1635	880×500	70×70	1500



SCREEN PRINTER

SPECIFICATION


MODEL	AXP-88RE	AXP-70SE	AXP-46LE
PCB			
PCB Size (LxW)/mm	70x70 ~ 880x500	50×70 ~ 700×460	50×50 ~ 460×360 550×360:BlockOption
PCB Thickness	0.3mm (Vacuum Jig), 0.4 ~ 5.0mm (Normal)		
PCB Support Method	Support Pin, Support Block (Magnetic)		
Mask			
Mask Size (LxW)/mm	736x736, 800x800, 980x980,1200x980	736×736, 800×800, 980×980	550×600, 650×550, 736×736
Mask Origin	Front, Center, Custom		
Printing			
Squeegee Type	Metal / Urethane Squeegee		
Squeegee Speed	0.1~200 mm/sec		
Squeeze Pressure	0.15~0.50 MPa Auto Pressure Control		
Cycle Time	6.5sec (Except Printing)		
Accuracy	± 0.015mm		
Repeatability	± 0.010mm		
Vision System			
Vision Camera	1 CCD Camera		
Camera F.O.V	Board (8x8mm), Stencil (8x8mm)		
Illumination Method	Programmable LED Lighting (S/W Control)		
Fiducial Types	Unique pattern recognition		
Fiducial Size	0.1~3.0mm		
Fiducial Position	Anywhere on PCB		
2D Inspection			
Detection	Insufficient, Incomplete, Excessive Solder, Bridge 0.3 sec/each F.O.V		
Conveyor			
Width Adjustment	Auto (Servo Motor)		
PCB Transfer Direction	Programmable (L→R, R→L)		
Transfer Height from Floor	900 ± 30mm (950 ± 30mm: Option)		
Cleaning			
Black Cleaning System	Wet / Dry / Vacuum / Blower		
Facilities			
Model Changeover time	2 min		
Operation System	WINDOWS XP		
Monitor	TFT-LCD 17"		
Power Requirements	Single-Phase 200~220V AC 50/60Hz		
Air Supply Requirements	0.5MPa ± 0.1MPa		

Setting the Standard LASER MARKING MACHINE

Customized Manufacturing & Semipermanent Marking Machine



- This product can be used semipermanently and possible to be printed various barcode (2D,1D) and mark by using the laser of SUNX CO2. (Average Life is over 10 years)

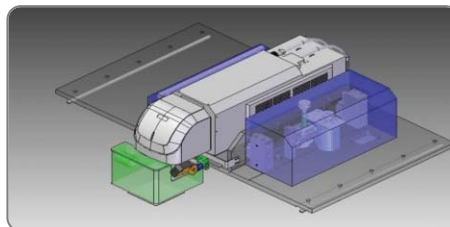


- Fast Tact Time : 7 second (Optimal - 2D, 400mm/sec)
 - Check time : PCB in-put -> Marking -> PCB Out-put
 - Conveyor Speed, Motion Speed Controller
- Economic Maintenance Cost

LP-400 Changing Cycle	Advantage (SUNX CO2 Laser Marking Head)
CO2 Change Cycle	100,000 hours (Avery Life : Over 10year) CO2 Laser Semipermanent Life

- Checking the marking barcode by Scanner and Camera (VISION)
 - VISION(Optional)(1D/2D scanner) - Cognex , Microscan



- Marking the various height as well as a certain height of PCB and CHIP by using Z axis SERVO MOTOR.



- Dust Collector for the optimal environment - Removal smoke and smell by the special collecting method



LASER MARKING MACHINE

SPECIFICATION

MODEL	MACHINE DEMENSION (L×W ×H)	Max.PCB (L×W)	Min.PCB (L×W)	Weight (kg)
ALMC-33YL	1080 X 1520 X 1520	440×330	50×60	750
ALMC-46XL	1180 X 1670 X 1520	530×460	60×60	850

LASER MARKING MACHINE COMPARISON

Company Name	Maintenance Cost	System Type	PCB Clean	Main Spare Parts
YJLINK	Semipermanent Life	SMT AUTOMATIC LINE IN, OUT LINE System	O	Panasonic
A	Semipermanent Life	Manual Line type	X	Optical Fiber Laser
B	Semipermanent Life	Manual Line	X	Fiber
C	Cost for Changing Lamp; \$11,000 par each 2 years	AutoMatic Line	X	Standard Laser

LASER MARKING MACHINE SPECIFICATION

Division	Contents
Model Name	LP-400 CO2 Series
Marking Laser	CO2 Laser
Laser Out-put	30W
Wave Length	10.6μℓ
Scan Speed	12,000mm/s
Response Line Speed	240m/min
Logo, Diagram	BMP/DXF/HPGL/JPEG
Character setting(Character Height, Width)	0.2 ~ 110mm (0.001mm Possible to Set Space)
Marking Space	0 ~ 110mm (0.001mm Possible to Set Space) Fan Shape : -180° ~ +180° (0.01° Possible to Set Space)
Character Arrangement	Straight Line, Proportion, Average Arrangement, Fan Shape
Character Sorts	English Capital Letter, English Small Letter, Number, Japanese (Catacana, Hiragana), Chinese Character, Mark, Business Register Number (Possible to set 50 sorts)
Bar Code	CODE39, CODE238, ITF, NW-7, JAN/UPC, RSS-14, RSS Limited, RSS Extended
2 dimensional Code	QR Code, Micro QR code, Data Matrics
Cooling System	Strong Air Cooled
Electronics Voltage	110 ~ 220V AC±10% or 200 ~ 240V AC±10% (Automatic transfer) 50/60HZ
Electronic Power Consumption (AC 100V)	1,000 VA
Electronic Power Consumption (AC 200V)	2,000 VA

Setting the Standard LABEL PRINT MACHINE

Automatically attach BAR CODE or 2D CODE Label on PCB



Features Features

On PCB board supplied by Conveyor in the next processing of Reflow

- 1) After separating barcode or 2nd code label which is supplied from Label Printer with Printer, Absorbed and picked up on head and then Installed on PCB.
 - 2) It is possible to have the exact label working by using camera that is option.
 - 3) Automatically selected model options and possible to use multi-using without tools.
- PC & PLC Control Method
 - SERVO MOTOR Control System (High Accuracy)
 - Auto PCB Clamping inside
 - SMEMA Interface
 - Line Data Management System
 - Conveyor Auto width Control System

Options

- Label Printer (Reading Rate over 99.9%)
- 17" LCD Monitor
- Label Disuse Unit Install
- Variety PCB ARRAY Action
- Prompt Putting Time
- Minimization Model Change Time (Data Construction)
- Prompt Process in Printing Data
- Prompt Checking in Printing Data
- Customized Manufacturing



LABEL PRINT MACHINE

SPECIFICATION

MODEL	MACHINE DEMENSION (L×W ×H)	Max.PCB (L×W)	Min.PCB (L×W)	Weight (kg)
ALBL-40YU	1100 X 1500 X 1600	440×400	50×60	750

Standard Specification

PCB Flow	Left->Right / Right->Left
Fixed Rail	Front / Rear rail
PCB Size	Max. 400mm(W) X 440mm(L), Min. 60mm(W) X 50mm(L)
PCB Thickness	0.5 ~ 2.0 t
PCB Pass Line	900 ± 30mm
Conveyor Width Control	Auto Width Control

Label Specification

Label Size	5*5 ~ 40*40
Label Feeding Quantity	1
Bobbin Diameter	76 mm
Label Paper	Standard
Label Putting Quantity(Array)	Limitless

Printer Specification

Label Printer	Zebra Z-110Xi III Plus 600dpi
Resolution	600dpi(25.5dots/mm)
Maximum Printing Width	81mm(600dpi)-104mm(203dpi)
Printing Speed	Max. 254mm/s(203dpi), 203mm/s(300dpi), 102mm/s(600dpi)
Memory	16 MB SDRAM; 8 MB non-volatile Flash memory
Communication Method	RS-232C,Parallel ports, Internal ZebraNet 10/100 PrintServer, USB 2.0
Weight	22.7kg
Working Temperature	5°C ~ 40°C

Scanner Specification

Bar Code Scanner	QUADRUS
Auto Focus Function	Auto Control and Optimization Function for fitting the focus with barcode information
Mega Pixel Processing Function	3.3mil Large Scale 1D & 2D code reading function
High Data Label Printing	High Resolution Optical System, Decoder function for Prompt Processing & Printing

Head Specification

Head Type	2 Head
Label Attach Time	Maximum 2.5 second / label
Head Attach Accuracy	± 0.2 mm
Head Turn	0° / 90° / 180° (Label Printing Turn Option by Program itself)
Vacuum Block Type	Possible to change in according to Label types
Attach Position Model Quantity	Limitless

INKJET MARKING MACHINE

Automatically Mark Letter on PCB by Ink



Features Features

- PC & PLC Control System
- SERVO MOTOR Control System (High Accuracy)
- Auto PCB Clamping Inside
- SMEMA Interface
- 17" LCD Monitor
- Inkjet Unit Maintenance Easy Construction
- Conveyor Auto Width Control System

Options

- Alarm Connector : IP68 7Way Socket
- Vice-Alarm Connector : IP68 9Way Socket
- User Port connector : IP68 25Way Socket
- Line Data Control System
- Customized Manufacturing



INKJET MARKING MACHINE

SPECIFICATION


MODEL	MACHINE DEMENSION (L×W ×H)	Max.PCB (L×W)	Min.PCB (L×W)	Weight (kg)
AIMC-40YU	1100 X 1500 X 1600	440×400	50×60	800

Standard Specification

PCB Flow	Left->Right / Right->Left
Fixed Rail	Front / Rear rail
PCB Size	Max. 400mm(W) X 440mm(L), Min. 60mm(W) X 50mm(L)
PCB Thickness	0.5 ~ 2.0 t
PCB Pass Line	900 ± 30mm
Conveyor Width Control	Auto Width Control

Printer Function

Auto Repeat Printing
Auto Reverse / Inversion Printing
Time Setting at User's Option
Serial / Arrange Number
Reverse / Inversion / Bold Character Printing
Character Width, Height Control
Delay Printing
Product Counting
Barcode
Message Repeat

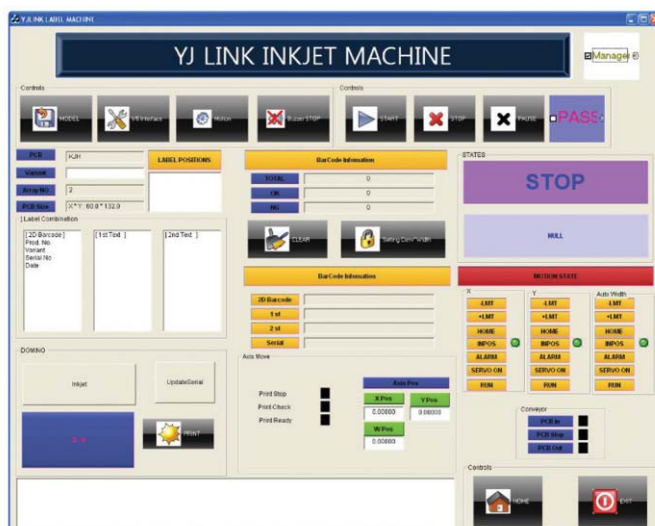

Setting the Standard

MAGAZINE LOADER CE TYPE

Using pusher, this unit automatically supplies PCB's stacked inside the magazine to the next machine



Features

- SMEMA interface
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- Alarm code display
- PCB pushing guide

Options

- 2 Kinds of selectable magazine size
- Space save type
- Touch screen operation
- PCB cleaner system
- High speed magazine exchange(19 sec)
- AUX, Buffer conveyor
- 5 Rack magazine converor
- PCB damage prevention
- Customized Manufacturing

MODEL	TYP	RAC	Max.PCB (L×	Min.PCB (L×	Dimension (L×W	Power	AIR	Weight
ALD-12CE	S	3	330×250	50×50	1170×810×1670	0.3kVA	0.5±0.1	180
	Y		440×330	50×65	1480×922×1670			200
	L		530×375	50×60	1750×992×1670			220
	XL		530×460	50×100	1750×1002×1670	0.4kVA		240
	2XL		610×460	50×100	1750×1062×1670			250



Setting the Standard MAGAZINE UNLOADER CE TYPE

Using pusher, this unit automatically stacks PCB's stacked inside the magazine to the next machine



Features

- SMEMA interface
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- Alarm code display

Options


- 2 Kinds of selectable magazine size
- Space save type
- Touch screen operation
- High speed magazine exchange(19 sec)
- Motorized auto width control system of pusher conveyor
- 5 Rack magazine conveyor
- PCB damage prevention function
- Auto width control
- Customized Manufacturing

MODEL	TYP	RAC	Max.PCB (L×	Min.PCB (L×	Dimension (L×W	Power	AIR	Weight
AUD-12CE	S	3	330×250	50×50	1670×810×1670	0.3kVA	0.5±0.1	190
	Y		440×330	50×65	2080×922×1670			210
	L		530×375	50×60	2550×992×1670			220
	XL		530×460	50×100	2550×1002×1670	0.4kVA		230
	2XL		610×460	50×100	2820×1062×1670			260

Setting the Standard

MAGAZINE LOADER STANDARD TYPE

Using pusher, this unit automatically supplies PCB's stacked inside the magazine to the next machine

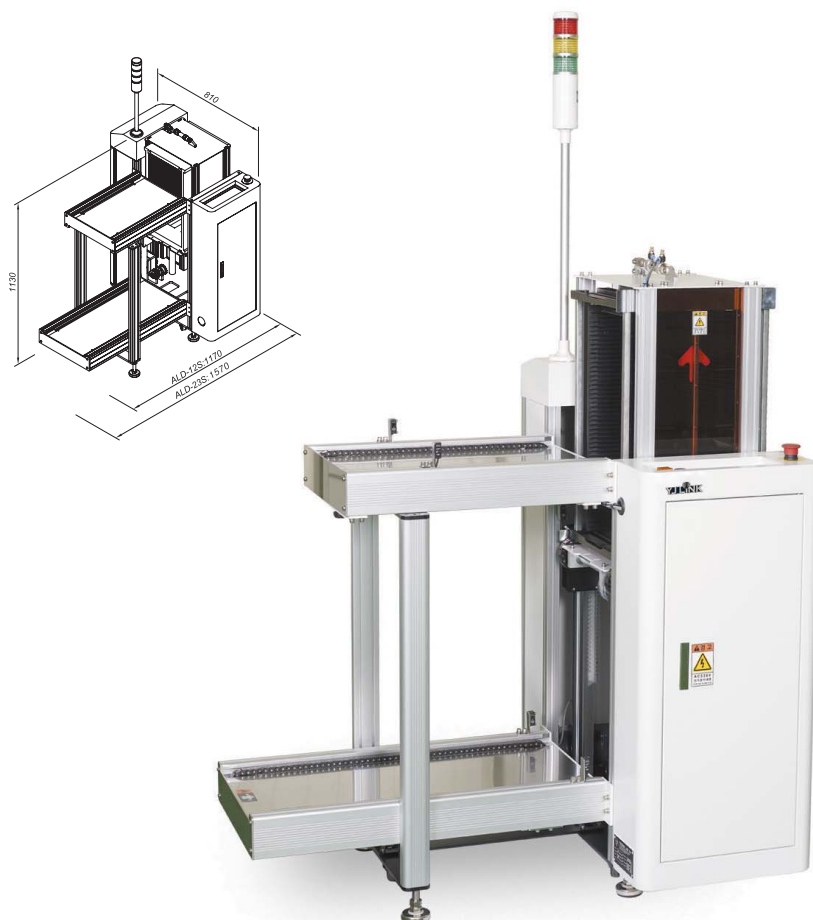

Features

- SME/MA interface
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- Alarm code display
- PCB pushing guide

Options


- 2 Kinds of selectable magazine size
- Space save type
- Touch screen operation
- PCB cleaner system
- High speed magazine exchange(19 sec)
- AUX, Buffer conveyor
- PCB damage prevention
- Customized Manufacturing

MODEL	TYP	R A C	Max.PCB (L×	Min.PCB (L×	Dimension (L×W	Power	AIR	Weight
ALD-12S	S	3	330×250	50×50	1170×810×1130	0.3kVA	0.5±0.1	170
ALD-23S		5			1570×810×1130			180
ALD-12Y	Y	3	440×330	50×65	1480×922×1130			190
ALD-23Y		5			1940×922×1130			200
ALD-12L	L	3	530×375	50×60	1750×992×1130			210
ALD-23L		5			2250×992×1130			220
ALD-12X	XL	3	530×460	50×100	1750×1002×1130	0.4kVA	230	
ALD-122X	2XL	3	610×460		2020×1062×1130		240	



Setting the Standard MAGAZINE UNLOADER STANDARD TYPE

Using pusher, this unit automatically stacks PCB's transferred from the previous process to magazine

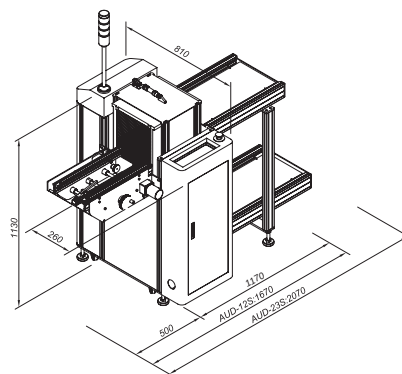

Fan Type A



Fan Type B

Features

- SME/MA interface
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- Alarm code display

Options

- Cooling fan
- 2 Kinds of selectable magazine size
- Space save type
- Touch screen operation
- High speed magazine exchange(19 sec)
- Motorized auto width control system of pusher conveyor
- PCB damage prevention function
- Customized Manufacturing

MODEL	TYP	RAC	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight
AUD-12S	S	3	330×250	50×50	1670×810×1130	0.3kVA	0.5±0.1	180
AUD-23S		5			2070×810×1130			190
AUD-12Y	Y	3	440×330	50×65	2080×922×1130			200
AUD-23Y		5			2540×922×1130			210
AUD-12L	L	3	530×375	50×60	2550×992×1130	0.4kVA	0.5±0.1	220
AUD-23L		5			3050×992×1130			230
AUD-12X	XL	3	530×460	50×100	2550×1002×1130			240
AUD-122X	2XL	3	610×460		2820×1062×1130			250

Setting the Standard

MAGAZINE LOADER HUMAN TECHNOLOGY TYPE

Magazine Loader designed to protect operator from back strain



Features

- Lower magazine discharge protects operator from back strain
- S/MEMA interface
- Touch screen operation
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- PCB damage prevention function & pushing guide

Options

- 2 Kinds of selectable magazine size
- PCB cleaner system
- High speed magazine exchange(19 sec)
- AUX, Buffer conveyor
- Customized Manufacturing

MODEL	TYP	RAC	Max.PCB (L×	Min.PCB (L×	Dimension (L×W	Power	AIR	Weight
ALD-22SH	S	4	330×250	50×50	1170×1180×1570	0.3kVA	0.5±0.1	230
ALD-22YH	Y		440×330	50×65	1480×1340×1570			250



Setting the Standard MAGAZINE UNLOADER HUMAN TECHNOLOGY TYPE

Magazine Unloader designed to protect operator
from back strain



Features

- Lower magazine discharge protects operator from musculoskeletal lesion
- SME/HA interface
- Touch screen operation
- Dual clamping system for magazine warp prevention
- Easy operation with "Easy S/W"
- Compact design
- LED tower light
- PCB damage prevention function

Options

- 2 Kinds of selectable magazine size
- Cooling fan
- High speed magazine exchange
- Motorized auto width control system of pusher conveyor
- Customized Manufacturing

MODEL	TYP	RAC	Max.PCB (L×	Min.PCB (L×	Dimension (L×W	Power	AIR	Weight
AUD-22SH	S	4	330×250	50×50	1670×1180×1570	0.3kVA	0.5±0.1	250
AUD-22YH	Y		440×330	50×65	2080×1340×1570			270

Setting the Standard VACUUM LODER - DESTACKER

Using vacuum pick-up this unit automatically supplies
BARE BOARD to the next machine



SL SIZE



YL SIZE

Features

- SMEMA interface
- PCB front input system free from fixed rail direction
- Compact design, LED tower light
- Safety cover design against dust and particle
- Reduced operation by PCB table up-down system
- Selectable vacuum pad against PCB size
- Adoption of magnet type and selectable pick-up point of PCB
- Convenient digital vacuum pressure sensor
- Enough vacuum for large PCB

Options

- Ionizer
- Touch screen operation
- Motorized auto width control system
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AVL-60S	S	330×250	50×50	600×660×1350	0.3kVA	0.5±0.1	160
AVL-60Y	Y	440×330		700×740×1350			170
AVL-60L	L	530×375		800×785×1350			180
AVL-60X	XL	530×460		800×880×1350			190
AVL-602X	2XL	610×460		900×880×1350			200



Setting the Standard BOAT LOADER / UNLOADER

This unit automatically supplies/stacks LEAD FRAME, BGA BOARD, BOAT in the semiconductor production



Features

- SMEMA interface, Touch screen operation
- Compact design, LED tower light
- High precision control by servo motor
- SUS frame in magazine contact part
- BOAT(PCB)jam detection able(On/Off available)
- No scratch rail working with BOAT(PCB)
- Stable magazine clamping
- Selectable magazine size(Ref.specification)

Options

- Cover design
- SUS device for clean room(Non-painting)
- Customized Manufacturing



MODEL-	BOAT	Max.Magazine (L×	Min.Magazine (L×W	Dimension (L×W×H)	Power	AIR	Weight
ABL-B20	AL, SUS	300×100×200	160×40×100	590×1170×1300	0.5kVA	0.5±0.1	180


MODEL-	BOAT	Max.Magazine (L×	Min.Magazine (L×W	Dimension (L×W×H)	Power	AIR	Weight
ABU-B20	AL, SUS	300×100×200	160×40×100	800×1170×1300	0.5kVA	0.5±0.1	220

Setting the Standard

LINK CONVEYOR

Diverse rail length
400mm~2500mm

Used in the SMT line to connect equipment effectively through SMEMA interface



Features

- PLC control
- SMEMA interface
- Buzzer, SMEMA interface LED display
- Compact design
- Durable structure by double base plate

Options

- Motorized auto width control system
- ESD safety cover
- Conveyor speed control
- Holding more than 2 PCB's by stopper or individual operation
- Front door
- PCB cooling fan
- Customized Manufacturing



COVER




COOLING



COOLING 06B SIDE
ROLLER CHAIN TYPE

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
ACC-60S	S	330×250	50×50	600×600×910	0.1kVA	70
ACC-60Y	Y	440×330		600×680×910		80
ACC-60L	L	530×375		600×725×910		90
ACC-60X	XL	530×460		600×810×910		100
ACC-602X	2XL	610×460		700×810×910		110



Setting the Standard

WORK TABLE

Diverse rail length
500mm~1200mm

This unit connects between equipments and allows to inspect PCB's



Features

- PLC control
- SMEMA interface
- Buzzer, SMEMA interface LED display
- Maximum front work space for user convenience
- Eye-protectable high effction sheet hanger is furnished
- Parts carrier and work instruction sheet hanger are furnished
- Easy PCB inspection and position change
- Compact design
- Durable structure by double base plate
- Pass / Work mode

Options

- Motorized auto width control system
- ESD safety cover
- Holding more than 2 PCB's by stopper or individual operation
- PCB cooling fan
- Preset counter function
- Furnished magnifying glass
- Customized Manufacturing




MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
AWT-80S	S	330×250	50×50	800×610×1550	0.2kVA	80
AWT-80Y	Y	440×330		800×690×1550		90
AWT-80L	L	530×375		800×735×1550		100
AWT-80X	XL	530×460		800×820×1550		110
AWT-802X	2XL	610×460		800×820×1550		110

Setting the Standard

REJECT CONVEYOR - ANRC SERIES

Allows good and bad board separation in a production line, and can be used visual inspection of PCB's without interrupting the PCB's flow




Features

- SMTA Interface
- Touch screen
- Compact design
- Durable structure by double base plate
- Reject, inspect and pass through modes provided
- Buzzer, SMTA Interface LED display
- Cover design safe from dust and mote

Options

- Auto width control system
- Conveyor speed control
- PCB cooling fan
- Adding more stages
- RS-232C communication with SPI
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
ANRC-100CE-S	S	330×250	50×50	1000×700×1025	0.3kVA	150
ANRC-100CE-Y	Y	440×330		1000×750×1025		160
ANRC-100CE-L	L	530×375		1000×800×1025		170
ANRC-100CE-X	XL	530×460		1000×850×1025		180
ANRC-100CE-2X	2XL	610×460		1000×910×1025		190



Setting the Standard AOI & AXI REWORK CONVEYOR - ADNC SERIES

Faulty boards can be lifted up for visual inspection without interruption the PCB's flow



Features

- SMEMA Interface
- Touch screen operation
- Compact design
- Durable structure by double base plate
- Buzzer, SMEMA Interface LED display
- Reject, inspect and pass through modes provided
- Equipped with Monitor- Keyboard-Mouse stand
- Cover design safe from dust and mote
- LED Tower light


Options

- Auto width control system
- Conveyor speed control
- PCB cooling fan
- Adding more stages
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
ADNC-1200CE-S	S	330×250	50×50	1760×700×1025	0.3kVA	180
ADNC-1200CE-Y	Y	440×330		1760×750×1025		190
ADNC-1200CE-L	L	530×375		1760×800×1025		200
ADNC-1200CE-X	XL	530×460		1760×850×1025		210
ADNC-1200CE-2X	2XL	610×460		1760×910×1025		220

Setting the Standard GATE CONVEYOR

This unit allows passage between the front and rear of machines without interrupting the PCB flow




Features

- PLC control
- SMEMA interface
- Compact design
- Durable structure by double base plate
- Buzzer, SMEMA interface LED display
- Timing belt adoption for low-noise & low-vibration
- Applied diverse conveyor rail length
- Slide method using by stepping motor
- ESD cover safe from dust and particle

Options

- Decreased M/C length by 2 platform sliding operation
- Motorized auto width control system
- Work table type
- Motorized conveyor speed control
- Touch screen operation
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
AG1-80S	S	330×250	50×50	1400(800+600)×580×980	0.3kVA	130
AG1-80Y	Y	440×330		1400(800+600)×660×980		140
AG1-80L	L	530×375		1400(800+600)×705×980		150
AG1-80X	XL	530×460		1400(800+600)×790×980		160
AG1-802X	2XL	610×460		1400(800+600)×790×980		160



Setting the Standard WAVE SOLDERING IN / OUT FEED CONVEYOR

Transfers PCB located at the front/rear of
WAVE SOLDERING MACHINE in the PCB assembly line



IN FEED

Features

- Compact design
- Durable structure by double base plate
- Motorized conveyor speed control
- Adjustable conveyor angle

Options

- Motorized auto width control system
- Touch screen operation
- Customized Manufacturing




OUT FEED

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
AIC-150S	S	330×250	50×50	600×900×820	0.2kVA	70
AIC-150Y	Y	440×330		600×710×820		80
AIC-150L	L	530×375		600×750×820		90
AIC-150X	XL	530×460		600×830×820		100
AIC-1502X	2XL	610×460		700×830×820		110

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
AOC-300S	S	330×250	50×50	2300×630×1465	0.5kVA	170
AOC-300Y	Y	440×330		2500×710×1465		190
AOC-300L	L	530×375		2700×750×1465		210
AOC-300X	XL	530×460		2700×830×1465		230
AOC-3002X	2XL	610×460		2900×830×1465		250

Setting the Standard MANUAL INSERTION CONVEYOR

Using PCB assembly process.
(CHAIN TYPE, BELT TYPE)



Features

- Motorized conveyor speed control
- Touch screen operation



Options

- Motorized auto width control system
- Instruction manual hanger
- Fluorescent lamp, Work table
- Shelf for stacking components and inspection device
- Air line, Power line
- Stopper for PCB holding(insertion conveyor)
- Customized Manufacturing





Setting the Standard SHUTTLE CONVEYOR - TRAVERSER

This unit effectively connects DUAL and SINGLE conveyor



Features

- Dual SMEMA interface, Touch screen operation
- Effective PCB supply by 6 modes
- Adjustable PCB position in/Out1/Out2-in1/in2/Out
- Applied sliding speed control function
- Durable structure by double base plate
- Buzzer SMEMA interface
- Lm guide adoption for low-noise & low-vibration
- Diverse conveyor rail length & sliding stroke
- Slided method by servo motor
- ESD safety cover

Options

- Aux. Dual buffer conveyor
- Motorized auto width control system
- Motorized conveyor speed control
- Bar code function by vision camera
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
ASHC-50S	S	330×250	50×50	500×1050×1050	0.3kVA	130
ASHC-50Y	Y	440×330		500×1050×1050		140
ASHC-50L	L	530×375		600×1200×1050		150
ASHC-50X	XL	530×460		700×1200×1050		150
ASHC-502X	2XL	610×460		700×1200×1050		160

Setting the Standard

SLIDING CONVEYOR -FIXED RAIL CHANGER

Allows rail changes when the fixed rail is different from the previous machine to the next machine



Features

- SMEA interface
- Timing belt adoption for low-noise & low-vibration
- Compact design
- Durable structure by double base plate
- Buzzer, SMEA interface LED display
- Diverse conveyor rail length & sliding stroke
standard type : 200mm stroke
- ESD safety cover

Options

- Motorized auto width control system
- Motorized conveyor speed control
- Motorized sliding speed control using inverter
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	Weight (kg)
ASC-50S	S	330×250	50×50	500×810×1050	0.3kVA	120
ASC-50Y	Y	440×330		500×890×1050		130
ASC-50L	L	530×375		600×935×1050		140
ASC-50X	XL	530×460		700×1010×1050		150
ASC-502X	2XL	610×460		700×1010×1050		150



Setting the Standard INVERTER - VERTICAL TURN CONVEYOR

This unit flips the PCB's for double sided assembly



Features

- SMTA interface
- Compact design
- Durable structure by double base plate
- Buzzer, SMTA interface LED display
- Decreased PCB stress by dual cylinder
- Cover design safe from dust particle
- LED tower light

Options


- Motorized auto width control system
- Aux. buffer conveyor
- Motorized conveyor speed control
- Touch screen operation
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AVT-50S	S	330×250	50×50	500×640×1350	0.3kVA	0.5±0.1	120
AVT-50Y	Y	440×330		600×720×1350			130
AVT-50L	L	530×375		800×765×1350			140
AVT-50X	XL	530×460		800×850×1350			150
AVT-502X	2XL	610×460		800×850×1350			150

Setting the Standard

TURNING CONVEYOR - HORIZONTAL TURN CONVEYOR

Connects previous and next process when PCB flow changes at 90° or 270°




Features

- SMEMA interface
- Compact design
- Durable structure by double base plate
- Buzzer, SMEMA interface LED display
- Decreased PCB stress by shock absorber
- Safe turning system by cylinder
- Cover design safe from dust particle
- LED tower light

Options

- Motorized auto width control system
- Aux. buffer conveyor
- Motorized conveyor speed control
- Touch screen operation
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AHT-50S	S	330×250	50×50	600×600×1100	0.3kVA	0.5±0.1	120
AHT-50Y	Y	440×330		700×700×1100			130
AHT-50L	L	530×375		800×800×1100			140
AHT-50X	XL	530×460		900×900×1100			150
AHT-502X	2XL	610×460		900×900×1100			150



Setting the Standard MULTI FUNCTION TURNING CONVEYOR

Used when PCB flow changes at 90° and connects previous and next machine and also flip the PCB and supply it to the next machine (4 selectable function-PASS, V-TURN, H-TURN, MULTI TURN)



PASS

H - TURN

V - TURN

MULTI TURN

Features

- SMEMA interface
- Selectable horizontal and vertical operation separately or concurrently
- Touch screen operation
- Durable structure by double base plate
- Buzzer alarm function
- Decreased PCB stress by shock absorber
- Safe turning system by dual cylinder
- Cover design safe from dust and mote
- LED tower light

Options


- Motorized auto width control system
- Aux. buffer conveyor
- Motorized conveyor speed control
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AHVT-50S	S	330×250	50×50	600×900×1260	0.4kVA	0.5±0.1	150
AHVT-50Y	Y	440×330		600×980×1260			160
AHVT-50L	L	530×375		780×1025×1260			170
AHVT-50X	XL	530×460		780×1100×1260			180
AHVT-502X	2XL	610×460		780×1100×1260			180

Setting the Standard

HORIZONTAL MULTI ANGLE TURNING CONVEYOR

Used to turn PCB at 0°, 90°, 180°, 270° and supply it to the next machine without changing line flow



PASS

SLIDING

90°H-TURN

180°H-TURN

270°H-TURN


Features

- SMEMA interface
- Adjustable PCB flow
- Touch screen operation
- Compact design
- Durable structure by double base plate
- Buzzer alarm function
- Stable PCB turn by vacuum adsorption
- Cover design safe from dust particle

Options

- Motorized auto width control system
- Aux. buffer conveyor
- Motorized conveyor speed control
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AHT-50SM	S	330×250	PASS : 50×50 TURN : 100×100	550×900×1130	0.4kVA	0.5±0.1	160
AHT-50YM	Y	440×330		700×980×1130			170
AHT-50LM	L	530×375		800×1100×1130			180
AHT-50XM	XL	530×460		800×1100×1130			180
AHT-502XM	2XL	610×460		900×1100×1130			190



Setting the Standard BUFFER STACKER - RACK TYPE

Controls the production speed between processes effectively



RACK,

Features

- SMTA interface
- Dual clamping system for magazine warp prevention
- Touch screen operation


Options

- Aux. buffer conveyor
- Cooling fan
- Motorized auto width control system
- FIFO, LIFO NG Stack, Loader, Unloader
- PCB damage prevention function
- Customized Manufacturing

MODEL	TYP	PCB	Max.PCB (L×	Min.PCB (L	Dimension (L×W	Power	AIR	Weight
ARB-25S	S	25~50	330×250	60×60	860×640×1130	0.3kVA	0.5±0.1	190
ARB-25Y	Y		440×330		1060×720×1130			210
ARB-25L	L		530×375		1260×765×1130			230
ARB-25X	XL		530×460		1260×860×1130			240
ARB-252X	2XL		610×460		1440×860×1130			250

Setting the Standard BUFFER STACKER - MAGAZINE TYPE

Controls the production speed between processes effectively



MAGAZINE

REAR M/G



MAGAZINE

FRONT M/G

CE TYPE




Features

- SMEMA interface
- FIFO, LIFO NG Stack, Loader, Unloader
- PCB damage prevention function
- Touch screen operation
- Dual clamping system for magazine warp
- Compact design
- LED tower light

Options

- Aux. Buffer conveyor
- High speed magazine exchange(19 sec)
- Cooling fan
- Motorized auto width control system
- Heat-resistant conveyor belt
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AMB-12S	S	330×250	60×60	935×1335×1130	0.3kVA	0.5±0.1	220
AMB-12Y	Y	440×330		1215×1600×1130			240
AMB-12L	L	530×375		1325×1780×1130			260
AMB-12X	XL	530×460		1325×1960×1130			270
AMB-122X	2XL	610×460		1490×1600×1130			280



Setting the Standard AOI NG BUFFER **INDIVIDUAL CONVEYOR TYPE**

Stacks NG PCB's and pushes GOOD PCB's located next to the
AOI inspection process

Patent pending



Features

- PCB shock-free and pusher free
- Stacking 15 PCB's available(Q' ty adjustable)
- SMEMA interface
- Compact design
- LED tower light
- Touch screen operation

Options

- RS-232C interface with AOI
- BCD I/O interface with AOI
- Motorized auto width control system
- Monitor-Keybord-Mouse stand
- Customized Manufacturing



REPAIR PC



REPAIR TABLE




2F CONVEYOR

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
ANB-15S	S	330×250	60×60	1040×660×1500	0.3kVA	0.5±0.1	220
ANB-15Y	Y	440×330		1100×740×1500			240
ANB-15L	L	530×375		1200×785×1500			260
ANB-15X	XL	530×460		1200×860×1500	0.4kVA		270
ANB-152X	2XL	610×460		1200×880×1500			280

Setting the Standard

AOI NG BUFFER RACK TYPE

Stacks NG PCB's and pushes GOOD PCB's located next to the AOI inspection process




Features

- SMTA interface
- Stacking max. 50PCB's available when using 1 pitch
- PCB damage prevention function
- Touch screen operation

Options


- Aux. Buffer conveyor
- Cooling fan
- Motorized auto width control system
- Customized Manufacturing

MODEL	TYP	PCB	Max.PCB (L×	Min.PCB (L	Dimension (L×W	Power	AIR	Weight
ARB-25S	S	25~50	330×250	60×60	860×640×1130	0.3kVA	0.5±0.1	190
ARB-25Y	Y		440×330		1060×720×1130			210
ARB-25L	L		530×375		1260×765×1130			230
ARB-25X	XL		530×460		1260×860×1130			240
ARB-252X	2XL		610×460		1440×860×1130			250



Setting the Standard AOI NG BUFFER **MAGAZINE TYPE**

Stacks NG PCB's and pushes GOOD PCB's located next to the AOI inspection process

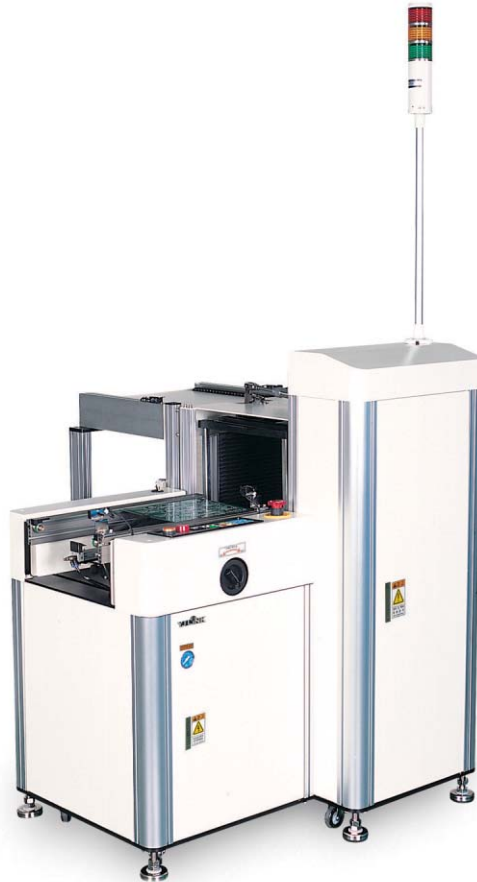

REAR M/G

MAGAZINE,



FRONT M/G

CE TYPE

Features

- SME/MA interface
- PCB damage prevention function
- Touch screen operation
- Dual clamping system for magazine warp

Options


- Aux. Buffer conveyor
- Minimum loss in magazine exchange
- Motorized auto width control system
- Monitor-Keyboard-Mouse stand
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AMB-12S	S	330×250	60×60	935×1335×1130	0.3KVA	0.5±0.1	220
AMB-12Y	Y	440×330		1215×1600×1130			250
AMB-12L	L	530×375		1325×1780×1130			280
AMB-12X	XL	530×460		1325×1960×1130			310
AMB-122X	2XL	610×460		1490×1960×1130			340

Setting the Standard SPI NG / GOOD BUFFER

Designed to stack NG PCB's to the next process in FIFO way located next to SPI machine

Patent pending




Features

- PCB shock-free and pusher free
- RS-232C interface with SPI
- NG PCB anti-touch verification
- Transfer GOOD PCB to the next machine in FIFO way
- Increased line efficiency in model exchange of screen printer
- Adjustable stacking q'ty of NG, GOOD PCB (NG+GOOD=10)
- SMEMA interface, Compact design
- LED tower light, Touch screen operation


Options

- Motorized auto width control system
- Monitor-Keyboard-Mouse stand
- Customized Manufacturing


MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
AMR-35S	S	330×250	60×60	780×753×1400	0.3kVA	0.5±0.1	210
AMR-35Y	Y	440×330		960×830×1400			230
AMR-35L	L	530×375		1140×880×1400			250
AMR-35X	XL	530×460		1140×965×1400	0.4kVA		260
AMR-352X	2XL	610×460		1300×965×1400			270



Setting the Standard SPI NG / GOOD BUFFER EXPLANATION

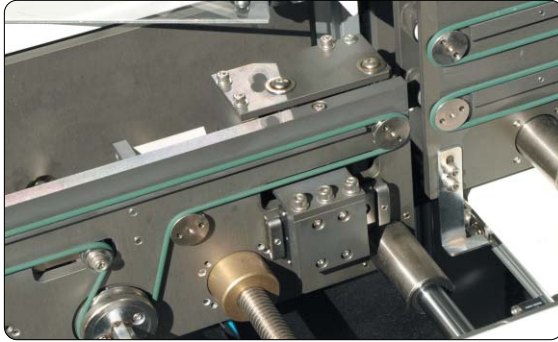

ANTI-TOUCH MAGNETIC ROLLER & LM GUIDE POWER TRAIN

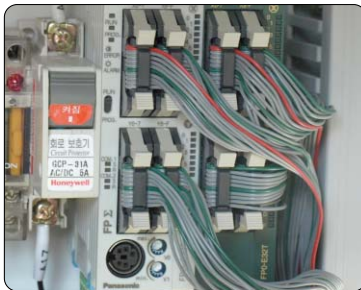

RS-232C



PCB DETECT SENSOR



ESD COVER

WITHOUT


A worker filters NG PCB by hands one by one
Moulder stops operation during mask clean time
Difficult to stop SPI, while a worker picks up NG PCB
Difficult to re-insert NG PCB after visual inspection

WITH

NO need to filter NG PCB except NG PCB's are full in the device
The PCB in the multi rack moves in FIFO way during mask clean time
SPI operates normally even during NG PCB verification
Convenience of good change by call function

Setting the Standard PCB CLEANER

Removes dust and static of PCB and transfers it to the next process



▲ Before-25EA

▲ After-100EA

Dust detection

Checking 25EA out of 150EA about pollution after unpack
⇒ Detected heavy PSR ink dust.


Cleaning function test

Performed cleaning one time on the top and bottom respectively every 100EA out of 150EA after loading


Cleaning result

Checked dust pollution degree of 100EA cleaned products
⇒ Verified over 95% cleaning effect


Ion Balance Comparison

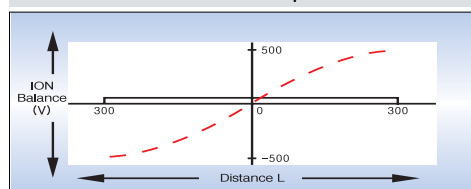

Ion Balance



Static removing area




Features

- SMEMA interface
- External high volume dust collector
- Non contact PCB (Scratch free & static free)
- Dust escape prevention
- Effective removal of particles after cleaning
- Vacuum adsorption type (Free from PCB stress)

Options

- Connection with vacuum loader or magazine loader
- Touch screen operation
- Motorized auto width control system
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
ADRC-50S	S	330×250	50×50	500×660×1350	0.5KVA	0.5±0.1	120
ADRC-50Y	Y	440×330		500×680×1350			130
ADRC-50L	L	530×375		500×725×1350			140
ADRC-50X	XL	530×460		500×810×1350			150
ADRC-502X	2XL	610×460		500×810×1350			150



Setting the Standard LINE UP CONVEYOR

Arranges PCB transferred from FLAT-BELT Conveyor or
MASH Conveyor to standard rail



Features

- PCB damage-preventive arrangement
- Applied ESD urethane belt
- Compact design
- Durable structure by double base plate
- Buzzer alarm function
- Motorized conveyor speed control


Options

- Touch screen operation
- Customized Manufacturing

MODEL	TYPE	Max.PCB (L×W)	Min.PCB (L×W)	Dimension (L×W×H)	Power	AIR	Weight (kg)
ALC-50S	S	330×250	50×60	600×500×1000	0.2kVA	0.5±0.1	80
ALC-50Y	Y	440×330		600×580×1000			100
ALC-50L	L	530×375		700×625×1000			110
ALC-50X	XL	530×460		700×700×1000			120
ALC-502X	2XL	610×460		800×700×1000			125

Setting the Standard SOLDERING ROBOT MACHINE

Using ROBOT, this unit Performs
PCB SOLDERING



Features

- Touch screen operation
- Solder detection sensor
- External fume collector
- Motorized tip brush & cleaner
- Motorized PCB clamping and arranging cylinder
- Jig guide for minimum exchange time of model
- Safety interlock door

Options

- Motorized auto width control system
- Turning conveyor for double sided soldering
- Pre-heater system for quality soldering
- PCB support jig
- Motorized conveyor speed control
- Customized Manufacturing



OTHER MACHINES



MULTI LOADER



COOLING OPTION



SPACE SAVE LOADER



SPACE SAVE UNLOADER



LONG CONVEYOR LOADER



SOLDERING ROBOT MACHINE



INSERTION WORK TABLE



NG CONVEYOR



AUX.BUFFER OPTION



WORK TABLE+INVERTER

Company History

The World Best
YJ LINK
<http://www.yjlink.com>



The world best in the field of IT F/A Equipment Manufacture, YJ LINK has manufactured and designed the machinery and facility of SMT, SMD LINE. We have been continually supported to the technology development for the machinery manufacturing for the best SMT, SMD line specification, the shorter tact time than before, the best working, the best environment and the best efficiency.

- 2011.09
Participated in International Information technology & Electronics Expo 2011, Korea
- 2011.08
Made the Strategic Cooperation in the North Eastern Europe
(Denmark, Norway, Sweden, Finland and Baltics : Estonia, Lahtvia and Lithuania)
- 2011.07
Obtained CE Certificate & CO Certificate
- 2011.07
Made the Strategic Cooperation in the North & Eastern Europe
(Poland, Russia, Ukraina, Kaliningrad)
- 2011.05
Made the Strategic Cooperation in the South Europe (Portugal, Spain and others)
- 2011.04
Improved and developed in quality of Main Machineries; Screen Printer,
Laser Marking Machine, Label Print Machine, Inkjet Marking Machine
- 2011.03
Established Busan Yangsan factory
- 2011.03
Made the Strategic Cooperation in Japan Strategic
- 2010.03
Established YJ LINK Japan in Osaka, YJ LINK China in Huizhou
- 2009.11
Obtained Cooperate Research Center Certification
Certificated Screen Printer CE
- 2009.06
Established YJ LINK COOPERATION
Established America & Mexico Branch Office
- 2008
Established Europe, South-East Asia and India Agent
Export Bright Small & Medium Business Confirmation
- 2007.06
Selected INNOBIZ Company & Venture Company Confirmation by SMBA
- 2006.06
Obtained ISO 9001 Certificate & CE Certificate
- 2005.04
Industry-Academic Cooperation with Daegu Yeungzin College SMT
Center and Kyungpook National University
- 2003.02
Established Yeungjin FA

The World Best

YJ LINK

Setting the Standard

YJ LINK Co.,LTD.

와이제이링크(주)

#358-109, Galsan-Dong, Dalseo-Gu, Daegu, Korea
TEL : +82-53-592-1723 / FAX : +82-53-592-1724
<http://www.yjlink.com> / E-mail : sales@yjlink.com

ATERON

ATERON SAN. VE TİC. LTD. ŞTİ.
Karacaoğlan Mah. 6167 Sok. No:44/H
Işıkent-Bornova / İZMİR
Tel: 0232 437 35 37
Fax: 0232 437 35 39
Email: info@ateron.com.tr
Website: www.ateron.com.tr

(The specification in this catalogue may be changed without prior notice for quality improvement)